

1 Basic Type

- RF1 Industrial RTD Sensor Assembly
- RF2 Fabricated RTD with Crimp Seal
- RFL Fabricated RTD with Clamp**

2 Type of RTD IEC 60751

- A** PT100 Class A (0- 100°C)
Maximum Temperature Range: 450°C
- B** PT100 Class B (-50- 500 °C)

3 Process Connection Thread

- 0 No Thread
- 1 1/2 NPT (Male)
- 2 ¾ NPT
- A Clamp**

4 Measuring Insert


- B** 2 mm ss 304
- C 3 mm ss 321**
- D 4 mm ss 304
- E 5 mm ss 304
- F 6 mm ss 304

5 Probe Length

- 0 10 mm
- 4 50 mm
- 5 100 mm
- 6 150 mm
- 7 200 mm

8 Special:

On request: 28 mm

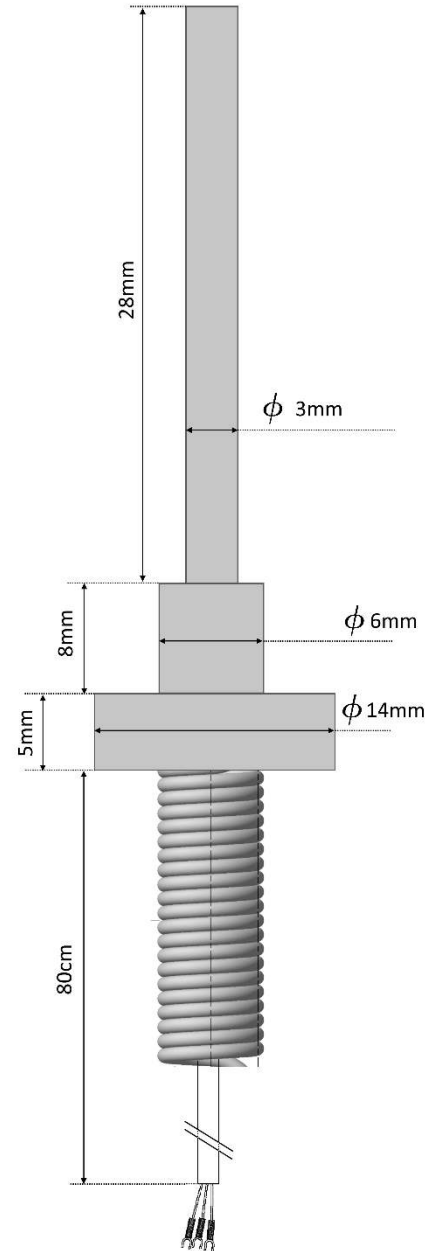

6 Cable Length

- L 1 m
- M 2 m
- N 5 m
- R 10 m
- Z Special**

On request: 80 cm

7 Lead Wire

- S Silicon**
- F Fiberglass-shielded
- T Teflon


8 Wires

- 2 Wires
- 3 Wires: 3X0.22**
- 4 Wires
- 6 Wires

9 Option

- N No Option
- E EX
- M IP67, IP68
- S Support: SS304 (According to the Picture)**
- W Thermowell
- X Water proof
- Y 1*Transmitter 4-20 mA/20-4 mA output
- Z 1*Transmitter 0-10v

Order Details



2