

## 1 Basic Type

- RF1 Industrial RTD Sensor Assembly
- RF2 Fabricated RTD with Crimp Seal
- RFL Fabricated RTD with Clamp**

## 2 Type of RTD IEC 60751

- A** PT100 Class A (0- 100°C)  
Maximum Temperature Range: 450°C
- B** PT100 Class B (-50- 500 °C)

## 3 Process Connection Thread

- 0 No Thread
- 1 1/2 NPT (Male)
- 2 ¾ NPT
- A Clamp**


## 4 Measuring Insert

- B 2 mm ss 304
- C 3 mm ss 321**
- D 4 mm ss 304
- E 5 mm ss 304
- F 6 mm ss 304

## 5 Probe Length

- 0 10 mm
- 4 50 mm
- 5 100 mm
- 6 150 mm
- 7 200 mm
- 8 Special:**

On request: 28 mm

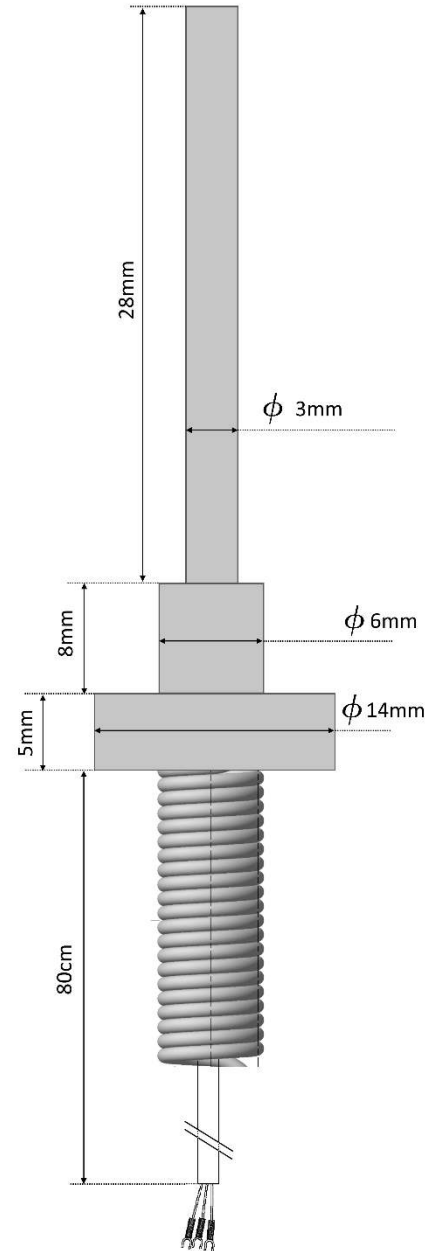

**6 Cable Length**

- L 1 m
- M 2 m
- N 5 m
- R 10 m
- Z Special**

On request: 80 cm

**7 Lead Wire**

- S Silicon**
- F Fiberglass-shielded
- T Teflon


**8 Wires**

- 2 Wires
- 3 Wires: 3X0.22**
- 4 Wires
- 6 Wires

**9 Option**

- N No Option
- E EX
- M IP67, IP68
- S Support: SS304 (According to the Picture)**
- W Thermowell
- X Water proof
- Y 1\*Transmitter 4-20 mA/20-4 mA output
- Z 1\*Transmitter 0-10v

**Order Details**



2