

1 Basic Type

TFB Thermocouple Industrial with Standard Head & Flange

TMB Mineral Insulated Thermocouple with Pot Seal

2 Type of Thermocouple

J Type J

S Type S

3 Process Connection Thread

0 No thread Fixed

B G ¼

C 1/2 BSP (Female)

H M33 x 2 Movable

4 Measuring Insert

A 1.5 mm ss 316

B 2 mm ss 316

C 3 mm ss 304

D 4 mm ss 316

E 5 mm ss 316

5 Probe Length


4 50 mm

5 100 mm

6 150 mm

7 200 mm

8 Special: 300 mm

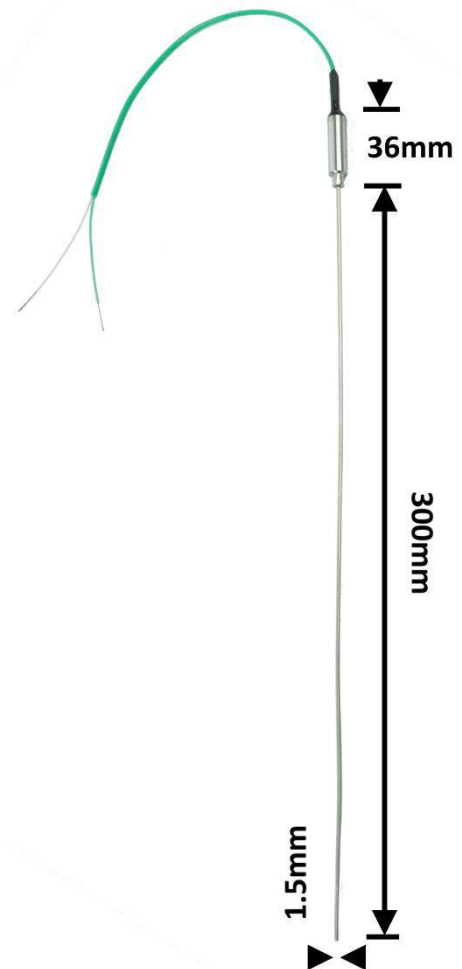

6 Cable Length

- L 1m
- M 2m
- N 5m

7 Lead Wire

- S Silicon
- F Fiberglass-shielded
- T Teflon
- K Kapton

8 Wires

- 2 2 wire-single
- 3 2 wire-duplex
- 4 2 wire-triplex

9 Option

- N No Option
- E EX
- M IP67, IP68
- S **Support: SS316 (36x6mm)**
- W Thermowell
- X Water proof
- Y 1*Transmitter 4-20 mA output

Order Details

