

1 Basic Type

RF1 Industrial RTD Sensor Assembly

RF2 Fabricated RTD with Crimp Seal

RG4 Bayonet RTD

2 Type of RTD IEC 60751

A PT100 Class A (-200 - 850°C)

B PT100 Class B (-50 - 500 °C)

3 Process Connection Thread

1 1/2 NPT

2 3/4 NPT

0 No Thread

4 G 3/8

4 Measuring Insert

C 3 mm SS 321

D 4 mm SS 316

E 5 mm SS 316

F 6 mm SS 316

G 8 mm SS 316

5 Probe Length


2 30 mm

3 40 mm

4 50 mm

5 100 mm

6 150 mm

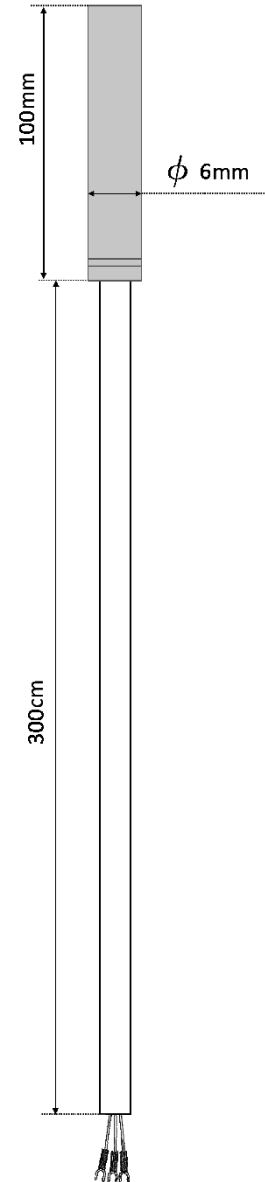

6 Cable Length

- L 1 meter
- M 2 meter
- O 300 cm**

7 Lead Wire

- S Silicon**
- F Fiberglass-shielded
- T Teflon

8 Option1 & Wires

- 2 2Wires
- 3 3Wires**
- 4 4 Wires

Order Details

