

1 Basic Type

- RF1 Industrial RTD Sensor Assembly
TM2 Mineral Insulated Thermocouple with pot seal
RG4 Bayonet RTD

2 Type of Thermocouple

- K Type K**
Maximum Temperature: 1250°C
S Type S

3 Process Connection Thread


- 1 1/2 NPT
2 3/4 NPT
Z Special (M8 Bolt)
4 G 3/8

4 Probe Diameter

- C 3 mm SS 316**
D 4 mm SS 316
E 5 mm SS 316
K 21.3 mm SS 310
G 8 mm SS 316

5 Probe Length

- 2 30 mm
3 40 mm
Z Special (220mm + 50mm)
5 100 mm
6 150 mm

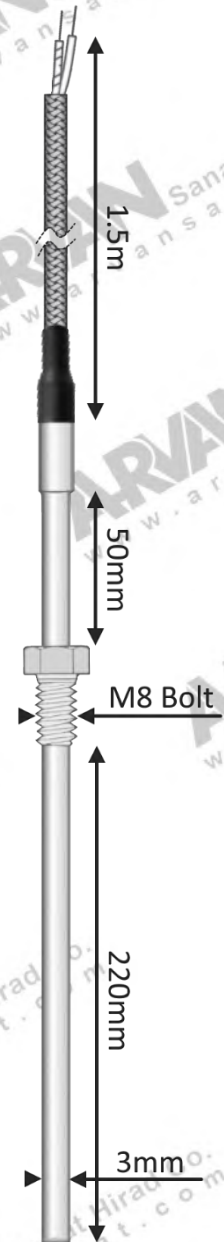

6 Cable Length

- Z Special (1.5 meter)
- M 2 meter
- 0 No Cable

7 Lead Wire

- N No lead wire
- F Fiberglass-shielded
- T Teflon

8 Option1 & Wires

- 2 2 wire-single
- 3 2 wire-duplex
- 4 2 wire-triplex

9 Option

- N No Option
- E EX
- M IP67, IP68
- S Support
- W Thermowell
- X Water proof
- Y 1*Transmitter 4-20 mA output