

## 1 Basic Type

- RF1 Industrial RTD Sensor Assembly
- RF2 Fabricated RTD Pt100 with Crimp Seal**
- RG4 Bayonet RTD

## 2 Type of RTD

- A PT100 class A (-50 to 550)
- B PT100 class B (-50 to 500)**

## 3 Process Connection Thread


- 1 1/2 NPT
- 2 3/4 NPT
- Z Special (M6 Bolt)**
- 4 G 3/8

## 4 Probe Diameter

- C 3 mm SS 316
- D 4 mm SS 316
- E 5 mm SS 316**
- K 21.3 mm SS 316
- G 8 mm SS 316

## 5 Probe Length

- 2 30 mm
- 3 40 mm
- 0 10 mm**
- 5 100 mm
- 6 150 mm

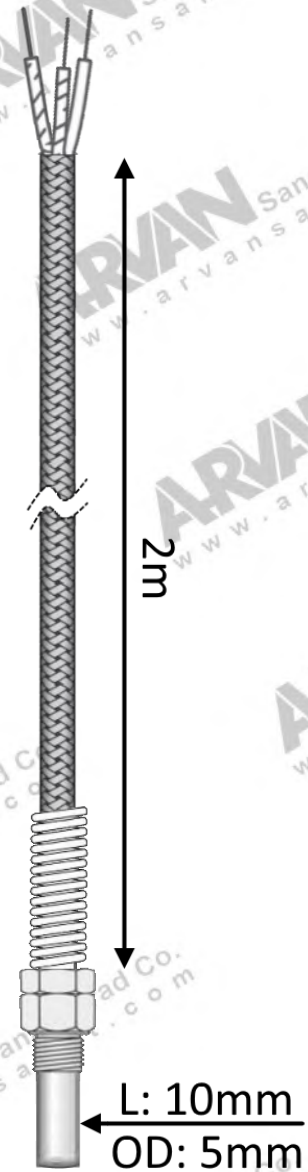

**6 Cable Length**

N No Cable

**M 2 meter**

O No Cable

**7 Lead Wire**

N No lead wire

**F Fiberglass-shielded**

T Teflon

**8 Option1 & Wires**

2 2-wire

**3 3-wire**

4 4-wire

**9 Option**

**N No Option**

E EX

M IP67, IP68

S Support

W Thermowell

X Water proof

Y 1\*Transmitter 4-20 mA output